

SCHMIDT BENDER

5-20x50 PM II
ULTRA SHORT

NEW




- Ultra short 4x zoom scope
- Ultra low profile locking elevation turret
- Capped windage turret
- Full metal rugged military design
- Completely waterproof up to 25 m

Contact us to find out more about our high-quality rifle scopes at:

Schmidt & Bender GmbH | Am Grossacker 42 | 35444 Biebertal, Germany | Phone: +49 6409 8115-0 | info@schmidt-bender.de | www.schmidt-bender.de

1. Dimensions and physical properties

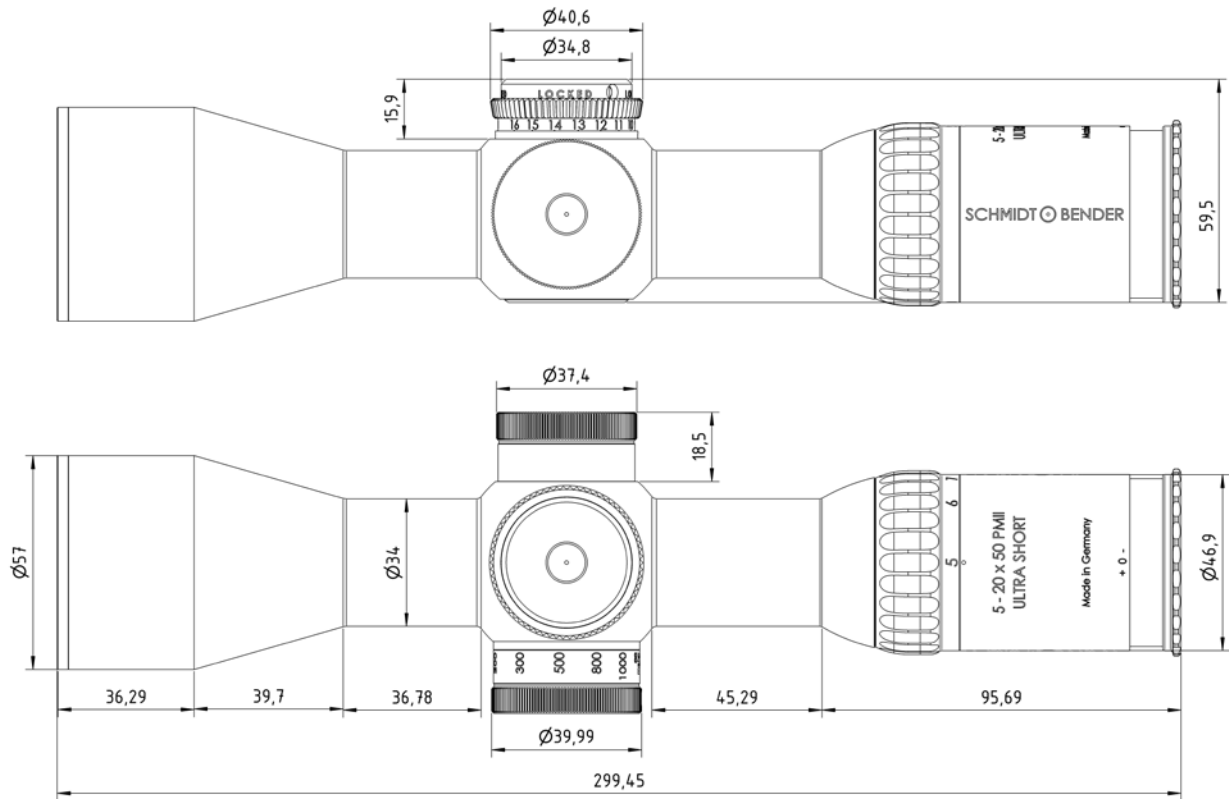

Dimensions in mm

Weight:	870 g
Length:	299,45 mm
Tube diameter:	34 mm

2. Optical Data

Magnification:	5 x - 20 x
Objective diameter:	50 mm
Field of view (m/100 m):	7,8 - 1,95
Exit pupil:	10,0 mm - 2,5 mm
Eye relief:	90 mm
Twilight factor:	15,81 - 31,62
Transmission:	90 % / Analysis ¹⁾
Focal plane:	1 st focal plane

¹⁾ D65 Day / Night at 370-780nm according to DIN-ISO 14490-5

3. Adjustments

Diopter:	+2 dpt to -3 dpt
Elevation (Low profile Single Turn with MTC and locking function):	
clicks:	0,1 mrad per click
more tactile clicks:	every 1 mrad
total adjustment:	0 - 17 mrad (standard)
Windage (Low profile capped Single Turn with Zero Stop) :	
clicks:	0,1 mrad per click
more tactile clicks:	on zero position
total adjustment:	±6 mrad
Parallax:	25 m to ∞

4. Environmental properties

Waterproof:	25 m
Temperature range:	
Storage:	-40°C to +70°C
Function:	-25°C to +55°C

5. Available configurations

a.) Turrets

Turret types

Elevation: Single Turn with MTC and locking function
Windage: Low profile capped Single Turn with Zero Stop

Turret configurations

Elevation	Windage
0,1 mrad cw	0,1 mrad cw
0,1 mrad ccw	0,1 mrad ccw
¼ MOA cw	¼ MOA cw
¼ MOA ccw	¼ MOA ccw

b.) Colors

- Black
- Pantone
- RAL 8000

c.) Illumination

- Non illuminated
- Illuminated

d.) Reticles

- P4 fine
- H2CMR
- Tremor 2
- Other reticles available on request.

More configurations on request!